
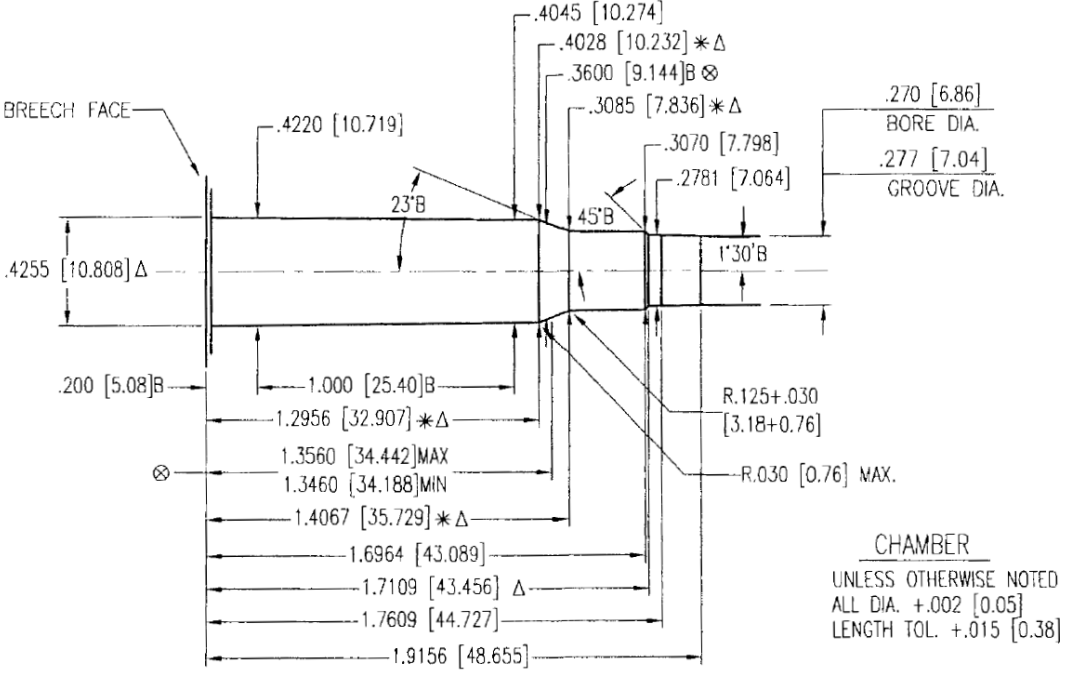


[Click HERE to return to the Table of Contents](#)

**MAXIMUM CARTRIDGE / MINIMUM CHAMBER**

**6.8MM REMINGTON SPC**

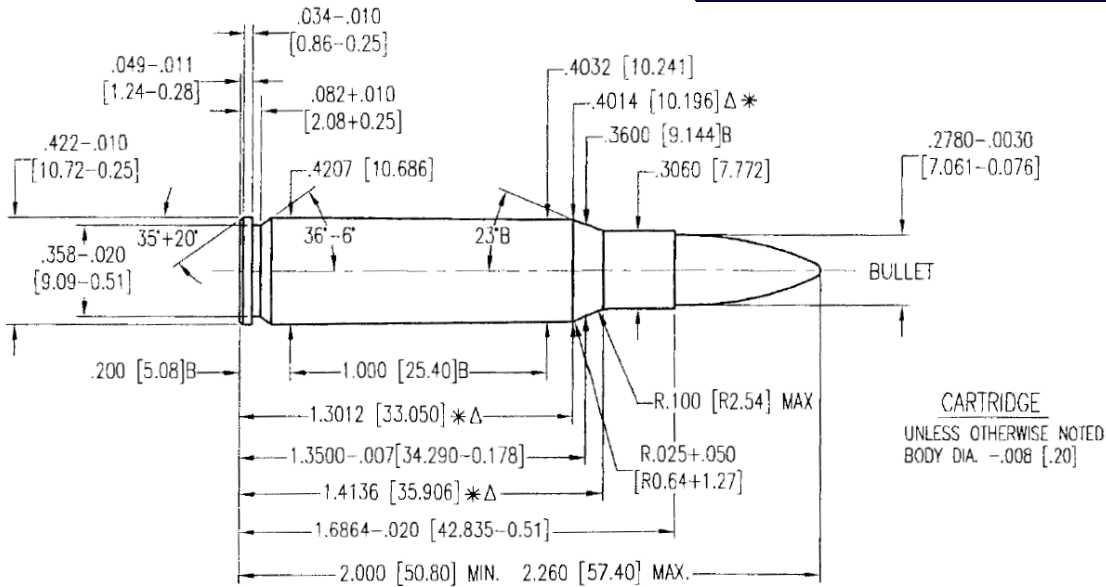

**NOTE:**  
 B=BASIC  
 [XX.XX]=MILLIMETERS  
 ∅ = HEADSPACE DIMENSION  
 Δ = REFERENCE DIMENSION  
 \* DIMENSIONS ARE TO INTERSECTION OF LINES  
 ALL CALCULATIONS APPLY AT MAXIMUM MATERIAL CONDITION (MMC)

Δ 4 GROOVES  
 Δ .160+.002 [4.06+0.05] WIDE  
 TWIST: 10[254] R.H. OPTIONAL  
 MIN. BORE & GROOVE  
 AREA: .0596 SQ. IN. [38.451 mm<sup>2</sup>]