



Click [HERE](#) to return to the Table of Contents

MAXIMUM CARTRIDGE / MINIMUM CHAMBER

22-250 REMINGTON

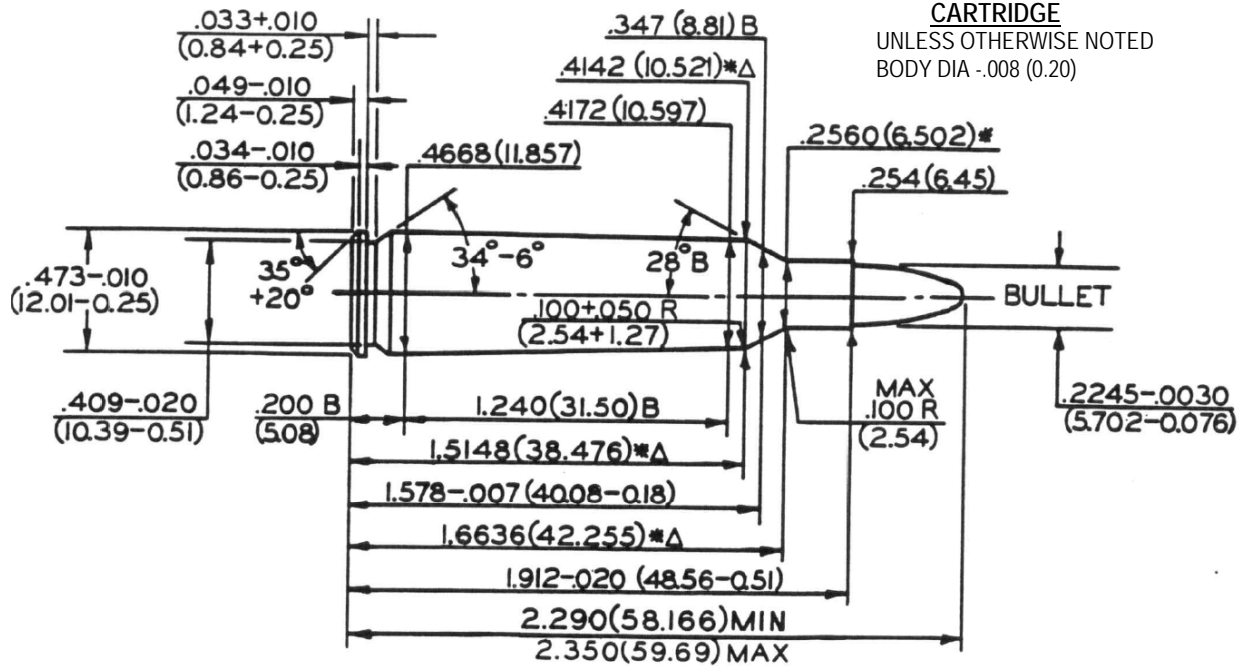

CARTRIDGE
UNLESS OTHERWISE NOTED
BODY DIA -.008 (0.20)

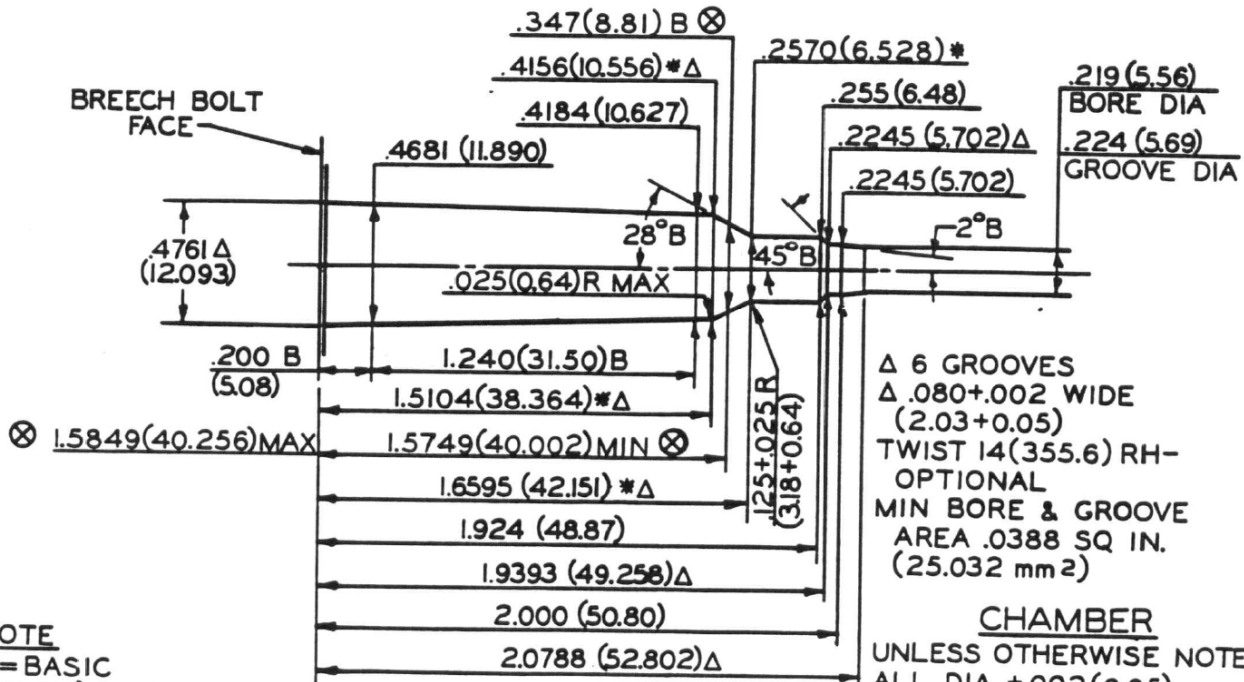

Δ 6 GROOVES
Δ .080+0.002 WIDE
(2.03+0.05)
TWIST 14(355.6) RH-
OPTIONAL
MIN BORE & GROOVE
AREA .0388 SQ IN.
(25.032 mm²)

CHAMBER
UNLESS OTHERWISE NOTED
ALL DIA +.002(0.05)
LENGTH TOL +.015(0.38)

NOTE
B=BASIC
XX.XX)=MILLIMETERS
⊗=HEADSPACE DIMENSION

* DIMENSIONS ARE TO INTERSECTION OF LINES Δ=REFERENCE DIMENSION
ALL CALCULATIONS APPLY AT MAXIMUM MATERIAL CONDITION (MMC)